

THANK YOU FOR YOUR PURCHASE
- WE APPRECIATE IT!

Galco utilizes the UniClip™ and the Ultimate Stealth™(US) Clip (fitting belts up to 11/2” wide or unlimited width respectively) which can be adjusted to carry the holster strong-side, cross-draw, or in the front of the hip (appendix carry). Whether your choice is FBI-forward cant, barrel-forward cant or neutral cant, the clips allow precise adjustment to your preferred angle of carry. A tucked-in shirt will completely conceal your firearm.

TUCK-N-GO 2.0 IWB

The Tuck-N-Go™ 2.0 is constructed of Premium Center Steerhide™ and features a metal reinforced mouth which allows a smooth and easy return to holster.

SCOUT 3.0 IWB

The open top Scout™ 3.0 is constructed from full grain rough side out steerhide. The smooth leather interior offers a faster, easier draw and the metal reinforced black leather mouth-band allows for easy holstering.

WALKABOUT 2.0 IWB

The WalkAbout™ holsters are made for semiautomatic pistols and revolvers. The holsters feature an attached ammunition carrier to carry an extra magazine or speedloader. The holsters are constructed from Premium Center Cut Steerhide and feature a metal reinforced mouth to allow a smooth and easy return to the holster.

INSPECTIONS + MAINTENANCE,
ADDITIONAL USER RESPONSIBILITIES

⚠ WARNING It is the user’s responsibility to ensure that the Galco product remains serviceable and safe, and able to continue service within its design intent.

NOTICE It is the user’s responsibility to inspect the holster before and after each use for signs of excessive wear or loss of retention capability, and appropriate tightness of all hardware.

DO

NOTICE Ensure that all screws are tightened snugly. Applying a small amount of clear nail polish to the threads will minimize screw back out. Ensure that the holster provides secure gun retention in all circumstances.

Clean as needed progressively by wiping with a soft cloth, soft bristle brush, soft damp cloth, soft damp cloth with mild soap to remove stubborn grime. Do not saturate with water and do not run under the tap.

DON’T

⚠ WARNING Do not use a loaded firearm in a holster without first testing – with a firearm double-checked and verified to be unloaded – for proper firearm fit.

NOTICE Do not put Galco synthetic or leather products in the washing machine. Do not use any solvents or corrosive chemicals on this product.

Do not use artificial heat to speed up the drying process, i.e. from a hair-dryer, oven, radiator, direct sunlight, etc. Do not leave Galco products on the dashboard of your car in summertime. Do not leave Galco products exposed to direct sunlight or excessive heat for long periods of time.

Do not use LocTite® or threadlock. Outgassing from these adhesive compounds will adversely affect plastic, nylon and rubber parts.

The above care and maintenance instructions cannot substitute for your good common sense. Following our recommended care and maintenance tips will allow you to get the maximum service life from all of your Galco products.

HOLSTER FIT / BREAK-IN 

Galco’s full grain leather holsters are made of the finest materials and are precision molded to specific firearms. It may appear the holster fit is too tight at first, but this is by design. We engineer our holsters to fit tightly knowing the leather fibers will relax to the proper fit with use.

⚠ WARNING UNLOAD YOUR FIREARM
(Chamber, magazine, cylinder) before testing holster fit.

If the holster has tension screws: Tension units are not pre-set at the factory. You may need to adjust them in order to holster your handgun for the first time. We recommend that you check your tension screw adjustments before each use. There is no reason to completely remove tension units. Do not use LocTite® on tension units. However, a single drop of clear nail polish applied to your tension screw threads may reduce its unwanted loosening.

If the fit is too tight when holstering your firearm the first time don’t force it. If you do force the firearm into the holster, it may be very difficult to remove. Instead, follow these simple steps to break in your new holster using a process called blocking:

1. Place the unloaded firearm in a plastic freezer bag, or cover it in 2-3 layers of plastic kitchen wrap. Do not cover the grip.
2. Insert the bagged/wrapped firearm slowly into the holster, gently twisting it side-to-side to minimize tearing of the bag/wrap.
3. Once the firearm is completely seated in the holster, twist approximately 1/16” in both directions 6-12 times.
4. Allow the bagged/wrapped firearm to sit in the holster for approximately 15 minutes.
5. Remove the firearm from the holster and remove the bag/wrap from the firearm.
6. Insert the unloaded firearm into the holster, which should now be snug but not loose. If it still too tight, repeat the above steps until the holster is broken in to your satisfaction.
7. If necessary, repeat steps 1-6 with an additional plastic freezer bag or additional 2-3 layers of plastic freezer wrap.

NOTICE If your holster has a retention strap: You may need to stretch the retention strap using your fingers only (no tools, no water, no chemicals, etc.) before you get it to snap.

1. Place the unloaded firearm in the holster.
2. Hold the firearm grip in your strong hand and the retention strap in your support hand.
3. Prepare the strap for stretching by grasping the snap and pulling the strap taut (removing the slack).
4. Twist the strap 90 degrees back and forth in a clockwise and counterclockwise rotation 10-12 times while keeping it taut.
5. Firmly push the firearm away from you while pulling on the strap and continue rotating the strap.
6. Release the tension for a moment and repeat two or three times.
7. Pull the strap over the back of the firearm without releasing tension.
8. While maintaining the strong tension, attempt to snap the retention strap closed.
9. Repeat step 5 as needed.

Following and repeating the above instructions is the only way to an ideal break-in and long service life with proper fit that will last many years.


It is common for the inside of a leather holster to scratch from a single holstering (called etching). A smooth leather lined holster will be even more subject to this normal occurrence. After this initial etching, the holster will custom fit your firearm.

HOLSTER FIT / BREAK-IN (continued)

Some modern pistols have very sharp edges, particularly surrounding the ejection port. This may cause an initial feeling of “dragging” on the draw, but will normally resolve quickly with just a few draw-and-holster repetitions.

Try our Draw-Ez™ applied to the inside of your leather holster to shorten the break-in period and provide a slicker draw. Draw-Ez only treats the interior surface of the leather and will not be absorbed by the leather or harm the finish. Do no use Draw-Ez on Premium Centercut Steerhide.

ULTIMATE STEALTH CLIP / UNI CLIP

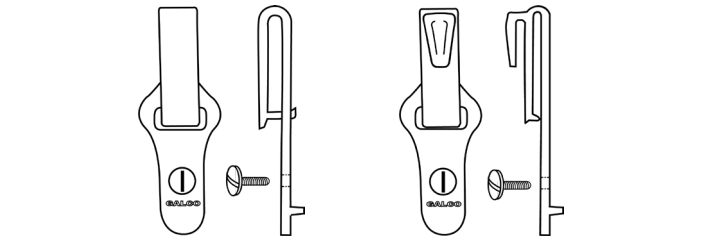


Galco has included two tuckable clips with your holster. The UniClip™ comes attached to the holster and is designed to go over the belt. For optimal use, ensure that the clips hook beneath the bottom seam on your trouser waistband in addition to going over your belt. This will add stability and allow the clip to lay flatter. The UniClip fits belts up to 1 1/2” wide.


Also included with your holster, the Ultimate Stealth Clip™ fits over the waistband of your trousers and under/behind your belt. Like the UniClip, the Ultimate Stealth Clip is best hooked over the bottom seam of your trouser waistband. It’s compatible with belts of unlimited width.

ADJUSTING THE TUCKABLE CLIPS

Changing the position of the clip enables the user to fully adjust the cant/angle and carry position/location.

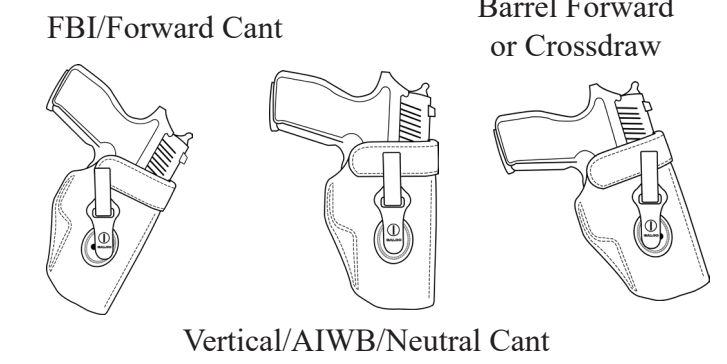


ADJUSTING FOR CARRY ANGLE

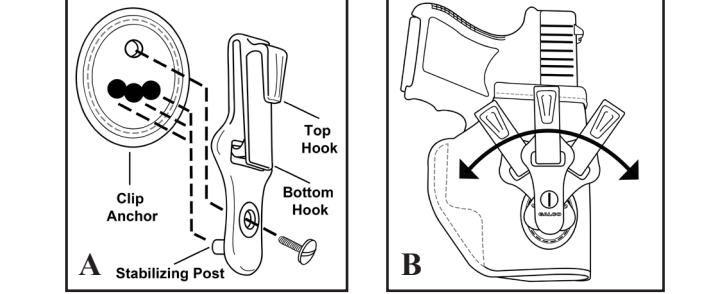


- A.** To change the angle of the holster, remove the screw and move the stabilizing post on the back of either clip to one of the three holes on the clip anchor. Position as desired then insert and tighten the screw.
- B.** Change the angle of either clip to personalize the cant of the holster to your preferred style of carry.

USING THE ULTIMATE STEALTH CLIP

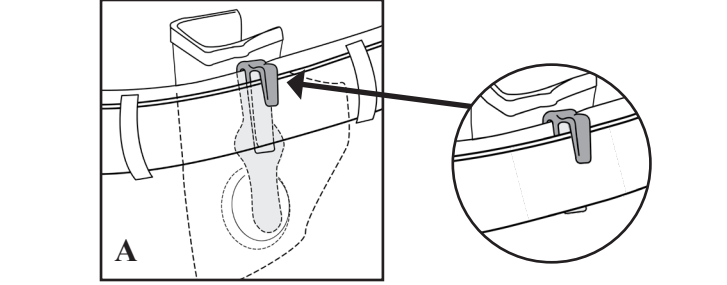


A. With your shirt tail outside, place the holster inside your pants with the bottom hook on the outside of your pants and under your belt. The bottom hook should catch the bottom seam of your trouser waistband. This will add stability and the clip will lay flatter. Your belt will cover the clip, leaving the top hook over the top of the belt (as seen below).

USING THE ULTIMATE STEALTH CLIP

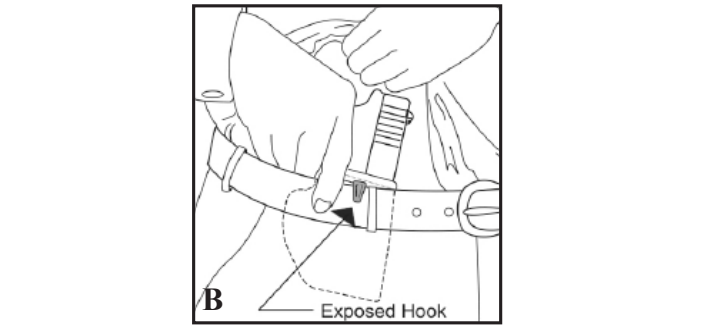

B. Tuck/fold your shirt tail between the backside of the bottom hook and the body of the holster. To draw the handgun, pull your shirt up with one hand, and draw with your dominant hand.

AMBIDEXTROUS USE

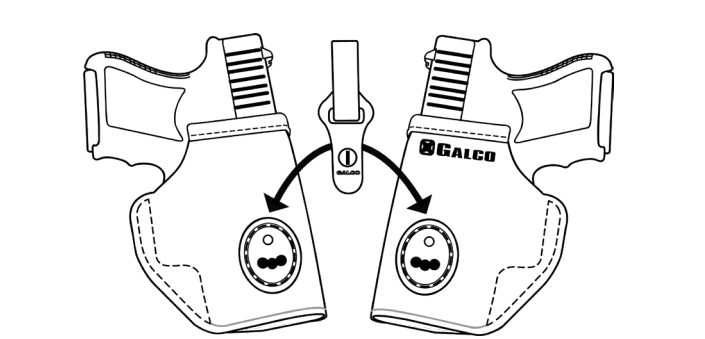

Moving the clip to the opposite side of the holster allows for the user to adapt the holster for ambidextrous use.

TERMS OF SALE

Because we have no control over the use of our products, all Galco products are sold as is and “with all faults”. The entire risk as to the quality and performance of the product is with the buyer. Should the product prove defective following its purchase, the buyer and not the manufacturer, distributor, or retailer assumes the entire risk of all the necessary servicing or repairs. Under no circumstances shall Galco be liable for incidental or consequential damages, such as loss of use of property, commercial loss and loss of earnings or profits. The implied warranties of merchantability and fitness for a particular purpose and all other warranties,expressed or implied, are excluded from this transaction and shall not apply to the product sold. The determination of the fitness or the suitability of any product for a specific use is the responsibility of the buyer. The illustrations shown here are typical as to the finish and application. Due to uncontrollable variances in color saturation, the actual product may differ slightly from that shown on our web site. Galco reserves the right to make changes in product built and/or sold by them at any time without incurring any obligation to make same or similar changes on products previously manufactured and/or sold by them. All Galco products are made in the U.S.A. and produced according to rigid specifications. Prices and models are subject to change without notice. Some states do not allow the exclusion or limitation of implied warranties or liability for incidental or consequential damages, so the above limitations and exclusions may not apply to you. Galco designs, features, and model names are the exclusive property of Galco International. Any and all persons including, but not limited to, individuals, firms and/or corporations are forbidden from imitating, copying or reproducing them in any way.